

SPECIFICATION FOR APPROVAL

CUSTOMER NAME : _____

PART No. : LED-5050-60-100

ISSUE DATE : 2012-6-25



BY CUSTOMER:

APPROVED SIGNATURE


--	--	--



QUALITY DEPT.	ENGINEERING DEPT.	PRODUCER
Tom Peng	Sean zhang	




Material and technology: high lm 5050SMD and flexible FPC
 Lighting character : view angle, color uniform
 Lumen depreciation : good dissipation, no more than 3% after 30000h
 Electrical safety : use 12v power supply, safety and reliable
 Installation : 3M tape back of strip, ultrathin design

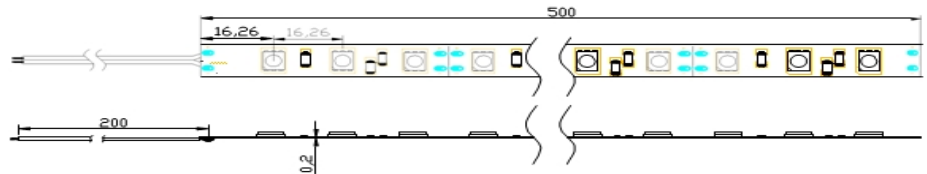

PRODUCT PARAMETER :

Power 14.4W/M
 Input voltage : DC12V/DC24V
 Waterproof rate : IP20/IP65/IP68
 Size : 5000MM*8MM
 LM : 900LM/M
 Led quantity/M : 60 led/m
 Led quantity/unit : 3 led/unit
 Color for choice : R/G/B/Y/W/WW
 View angle : 120_

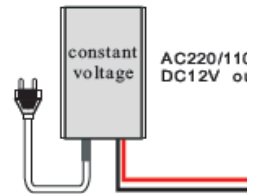

POWER SUPPLY INSTALLATION INSTRUCTION




0

Power supply : 12v constant voltage
 Power supply match : suggest 5m with one power supply
 power supply connection : attention the positive and negative ,don't polarity reversed
 Strip cutting : 3 led/unit, any length cutting for the unit


PRODUCT MODEL:

Model	color	working current power	view angle	led quantity/M	size(mm)	package
LED-5050R-60-100		4.8W/M	120°	60	5000X8	5M/roll
LED-5050WW-60-100						
LED-5050B-60-100						
LED-5050G-60-100						
LED-5050W-60-100						
LED-5050P-60-100						
LED-5050RGB-60-100						

PRODUCT PACKAGE CHART:



5m/roll with antistatic bag



carton size:64*24*24cm 60pcs/cartin