




NOTES

- * Poles:1-40
- * Material:NORYL UL94V-1 BLACK
- Specifications
- * Current rating: 3A AC, DC
- * Voltage rating: 250V AC, DC
- * Temperature range: -25°C~+85°C
- * Insulation resistance: 1,000MΩ min.
- * Withstand voltage: 800V AC/minute

"A"&"B" DIM. TOLERANCE

- 1P ~ 10P±0.20
- 11P~20P±0.25
- 21P~30P±0.35
- 31P~40P±0.45

CKTS	DIM. "A"	DIM. "B"
1		2.65
2	2.54	5.19
3	5.08	7.73
4	7.62	10.27
5	10.16	12.81
6	12.70	15.35
7	15.24	17.89
8	17.78	20.43
9	20.32	22.97
10	22.86	25.51
11	25.40	28.05
12	27.94	30.59
13	30.48	33.13
14	33.02	35.67
15	35.56	38.21
16	38.10	40.75
17	40.64	43.29
18	43.18	45.83
19	45.72	48.37
20	48.26	50.91
21	50.80	53.45
22	53.34	55.99
23	55.88	58.53
24	58.42	61.07
25	60.96	63.61
27	66.04	68.69
30	73.66	76.31
32	78.74	81.39
34	83.82	86.47
36	88.90	91.55
40	99.06	101.71

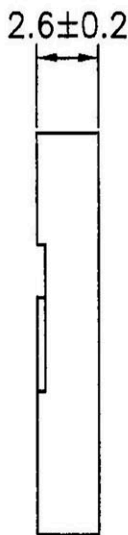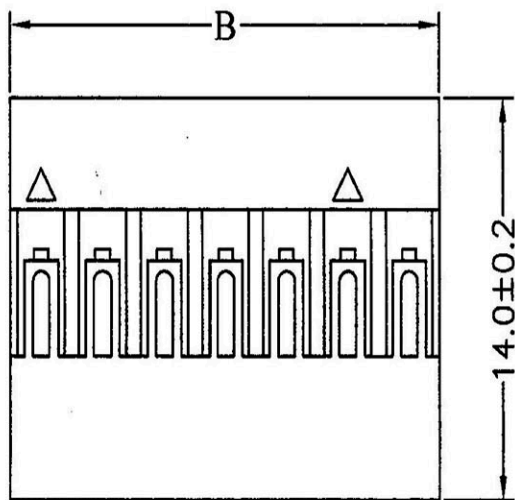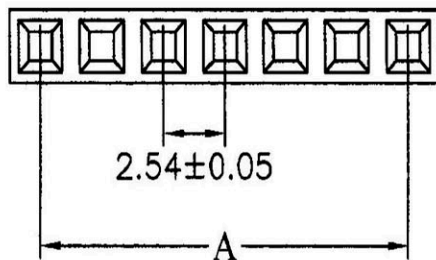

RoHS
Compliant

HSM 玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

APPD. 核准		TOLERANCE 容許公差	PART NAME 品名
DWG. 製圖		SCALE 比例	
DATE 制表日	Helen	UNIT 單位	PART NO.
2022/6/20		M M	
		PAGE 張數	料號
		1 OF 1	H4000-XXPSNB00R
		REV. 版本	
		B	

2.54mm HOUSING SINGLE ROW 1X??P
WITHOUT BUMP BLACK COLOR ROHS